


DI-BOX for pedal board

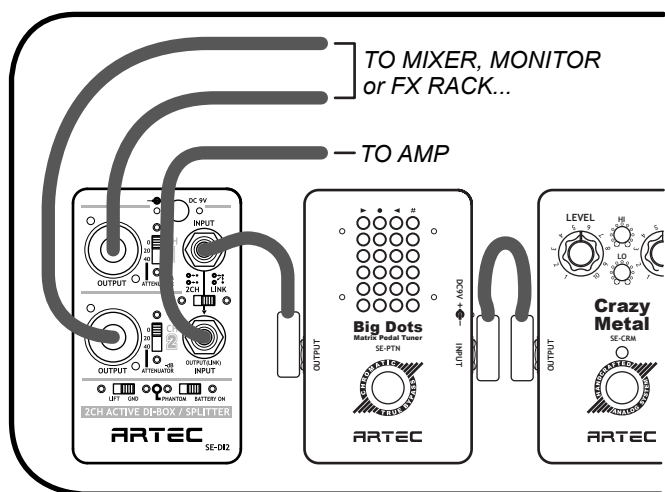


SE-DI2 specification


- Battery: 9V Alkaline 6LR6I or 6F22
- DC power supply: 9V regulated
- Power consumption: 1.5mA
- Phantom power: 48v standard
- Frequency response : 10Hz to 40kHz
- Input impedance : 240kohm
- Output impedance : 600ohm
- Dimension: 75.5(w) x 115.5(h) x 47.5(d) (mm)
- Weight: 260g (include battery)

Operation Mode

Mode 1 : 2CH mode

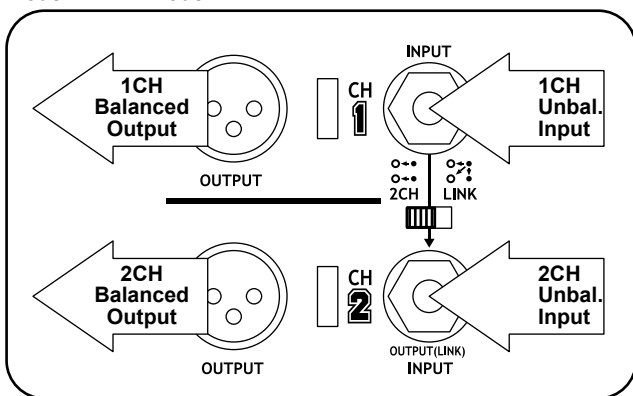


Mode 2 : Link mode

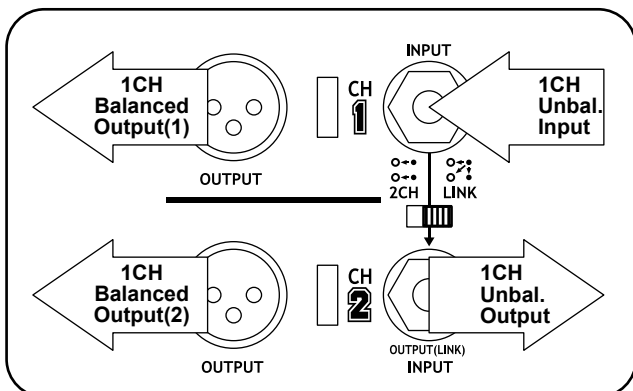

ARTEC SE-DI2


2CH ACTIVE DI-BOX / SPLITTER

PROFESSIONAL
DI-BOX FOR
PEDAL BOARD

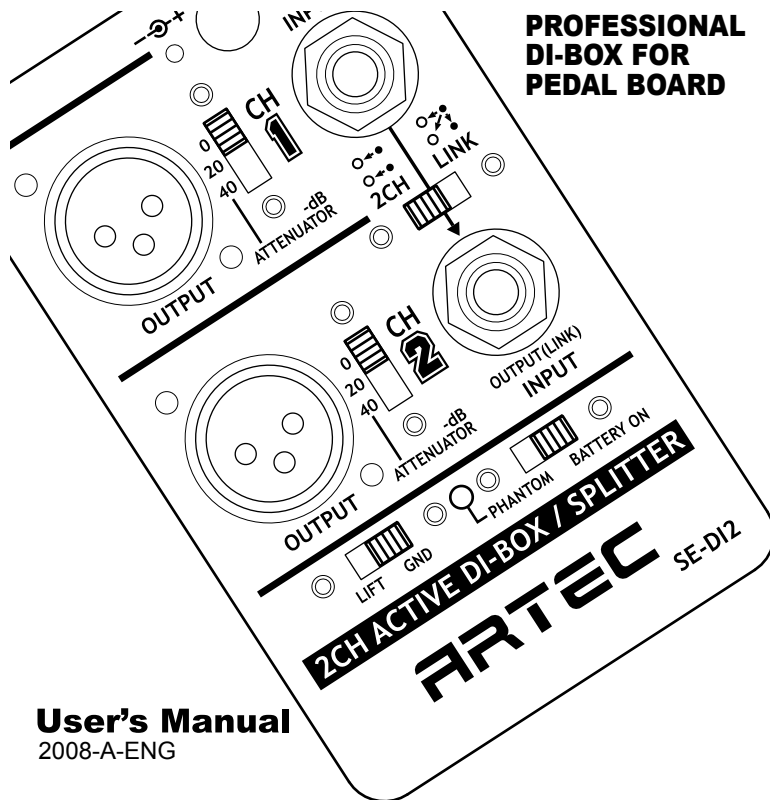

User's Manual
2008-A-ENG

Controls

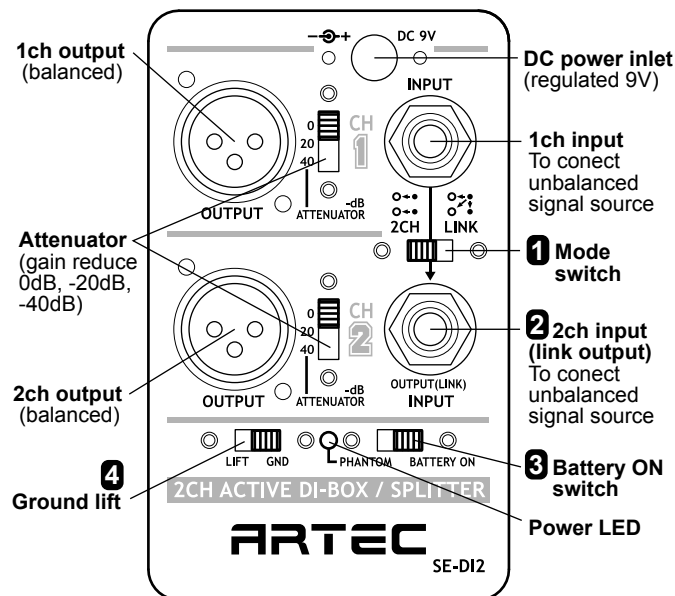

- 1 Mode switch:** see 'Operation mode' page.
- 2 2ch input jack** when mode switch set to [2CH].
Linked low-z output jack when mode switch set to [LINK].
see 'Operation mode' page.
- 3** When [BATTERY ON], Use Battery or DC input.
When [PHANTOM], Use Phantom power.
- 4** When [LIFT], it can interrupt the grounding between SE-DI2 and output-connected equipment. (can not use phantom power)